
RICE LAKE

EZ Mount 1 Mild Steel

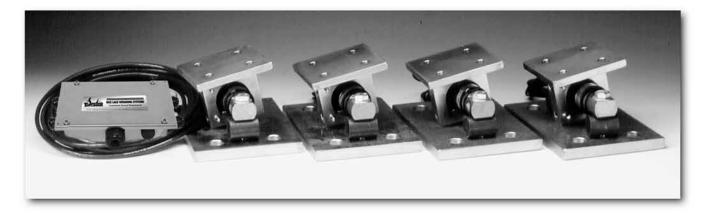

Available in configurations with three or four mounting assemblies. Picture is a representation of actual product

The EZ Mount 1 Series weigh modules utilize the double-ended beam design with an articulating top plate to provide superior accuracy in any loading condition. The double-ended beam design means there is less cumbersome hardware and each module has a lower profile than modules of different configurations. NTEP Certified and FM approved RL70000 Series load cells give you accuracy and dependability in many applications, including intrinsically safe and explosion proof areas.

Module with RL70000 double-ended shear beam load cell. Refer to page 147 for load cell specifications.



COMPLETE KIT INCLUDES

- 1 JB4SS NEMA 4X stainless steel signal trim junction box
- · 3 or 4 EZ Mount 1 mild steel compression mounts
- 3 or 4 RL70000 double-ended shear beam load cells (see page 147)
- 25ft of our Hostile Environment EL147HE SURVIVOR® load cell cable

APPLICATIONS

Medium-to heavy-capacity tank and hopper weighing applications

STANDARD FEATURES

- Capacities (per module): 5000-250,000 lb (2268-113,398.1 kg)
- NTEP Certified load cells
- Unique sliding pin design compensates for thermal expansion/contraction
- · Self-checking
- Easy load cell replacement
- Simplified design allows bolting directly to tank and floor
- · Center-loaded double-ended shear beam design
- Low-profile design
- · Painted mild steel construction

OPTIONAL FEATURES

- Kits available with Revere Transducers 5103 load cell, capacities in 5000-150,000 lb (2268.0-68,039.0 kg)
- Refer to page 87 for shims

LOAD CELL CERTIFICATIONS









NOTE: Check with your local weights & measure officials for suitability in Legal for Trade applications.

RICE LAKE

EZ Mount 1 Mild Steel





DIMENSIONS

RATED CAPACITY	C	C1	Н	H1	H2	L	L1	L2	L3	L4	T	W	W1	W2	W3
lb/inches		<u>'</u>													
5000-20,000	.56	1.06	5.31	.75	.50	11.00	8.00	3.00	6.00	6.87	5/8-18 UNF	7.50	4.00	3.00	6.00
30,000-60,000	.68	1.19	8.43	1.00	.75	15.00	11.50	5.12	8.00	8.50	1-14UNS	10.00	6.00	5.12	8.00
100,000	.81	1.38	10.37	1.25	1.25	18.00	14.00	7.50	10.00	9.50	1-14 UNS	12.00	9.00	7.50	10.00
150,000	.81	1.38	10.37	1.25	1.25	18.00	14.00	7.50	10.00	9.50	1-14 UNS	12.00	9.00	7.50	10.00
200,000-250,000	1.06	1.88	16.75	2.00	2.00	26.00	20.00	9.00	12.00	13.00	1 1/2-12 UNS	12.00	6.00	9.00	12.00
kg/mm															
2268.0-9071.9	14.2	26.9	134.9	19.1	12.7	279.4	203.2	76.2	152.4	174.5	5/8-18 UNF	190.5	101.6	76.2	152.4
13,607.8-27,215.5	17.3	30.2	214.1	25.4	19.1	381.0	292.1	130.0	203.2	215.9	1-14UNS	254.0	152.4	130.1	203.2
45,359.2	20.6	35.1	263.4	31.8	31.8	457.2	355.6	190.5	254.0	241.3	1-14 UNS	304.8	228.6	190.5	254.0
68,039.0	20.6	35.1	263.4	31.8	31.8	457.2	355.6	190.5	254.0	241.3	1-14 UNS	304.8	228.6	190.5	254.0
90,718.5-113,398.1	26.9	47.8	425.5	50.8	50.8	660.4	508.0	228.6	304.8	330.2	1 1/2-12 UNS	304.8	152.4	228.6	304.8

EZ MOUNT 1 MILD STEEL ORDER INFORMATION

LOAD RATING (PER	MODULE)	PART#	PRICE			
Single Module (Does	NOT Include Load Cell)					
5000-20,000 lb	(2268.0-9071.9 kg)	17823	Consult			
30,000-60,000 lb	(13,607.8-27,215.5 kg)	17824	Consult			
100,000 lb	(45,359.2 kg)	17850	Consult			
150,000 lb	(68,039.0 kg)	29012	Consult			
200,000-250,000 lb	(90,719-113,398.4 kg)	26068	Consult			
3-Module Kit						
5000 lb	(2268.0 kg)	18163	Consult			
10,000 lb	(4535.9 kg)	18164	Consult			
20,000 lb	(9071.9 kg)	18165	Consult			
30,000 lb	(13,607.8 kg)	32164	Consult			
40,000 lb	(18,143.7 kg)	32167	Consult			
50,000 lb	(22,679.6 kg)	18166	Consult			
60,000 lb	(27,215.5 kg)	18167	Consult			
100,000 lb	(45,359.2 kg)	18168	Consult			
150,000 lb	(68,040 kg)	43290	Consult			
4-Module Kit						
5000 lb	(2268.0 kg)	18169	Consult			
10,000 lb	(4535.9 kg)	18170	Consult			
20,000 lb	(9071.9 kg)	18171	Consult			
30,000 lb	(13,607.8 kg)	32165	Consult			
40,000 lb	(18,143.7 kg)	32166	Consult			
50,000 lb	(22,679.6 kg)	18172	Consult			
60,000 lb	(27,215.5 kg)	18173	Consult			
100,000 lb	(45,359.2 kg)	18174	Consult			
150,000 lb	(68,040 kg)	43291	Consult			

RTI EZ MOUNT 1 MILD STEEL ORDER INFORMATION

LOAD RATING (PE	D MODULE)	PART#	PRICE				
*	H MUDULE)	PART#	PRICE				
3-Module Kit	1	1					
5000 lb	(2268.0 kg)	18175	Consult				
10,000 lb	(4535.9 kg)	18176	Consult				
20,000 lb	(9071.9 kg)	18177	Consult				
30,000 lb	(13,607.8 kg)	32169	Consult				
40,000 lb	(18,143.7 kg)	32171	Consult				
50,000 lb	(22,679.6 kg)	18178	Consult				
60,000 lb	(27,215.5 kg)	18179	Consult				
100,000 lb	(45,359.2 kg)	18180	Consult				
150,000 lb	(68,039.0 kg)	18181	Consult				
4-Module Kit							
5000 lb	(2268.0 kg)	18182	Consult				
10,000 lb	(4535.9 kg)	18183	Consult				
20,000 lb	(9071.9 kg)	18184	Consult				
30,000 lb	(13,607.8 kg)	32170	Consult				
40,000 lb	(18,143.7 kg)	32172	Consult				
50,000 lb	(22,679.6 kg)	18185	Consult				
60,000 lb	(27,215.5 kg)	18186	Consult				
100,000 lb	(45,359.2 kg)	18187	Consult				
150,000 lb	(68,039.0 kg)	18188	Consult				
Dummy Load Cells							
5000-20,000 lb		33749	Consult				
30,000-60,000 lb		74016	Consult				
100,000 lb		94175	Consult				
150,000 lb		158715	Consult				
Grounding Kit							
126419	5K-60K, includes gr mounting hardware	Consult					